


RADA PA - TF



- WRAS Approved
- Pre-plumbed shower panel with push button timed flow control & vandal resistant shower head
- Concealed pipe-work which protects users from high surface temperatures
- Long, sleek design – suitable for all ages and abilities
- Robust & durable materials used throughout
- Easy to install and maintain - Integral isolator & flexible connection provided
- Satin stainless steel finish
- For connection to pre-blended water supply
- Product designed to reduce water consumption

**Specify as: Rada PA-TF Shower Panel Assembly (1.1613.040)**

Ready to install satin finish stainless steel panel with single pipe entry for connection to pre-blended supply, incorporating a Rada TF503 push button timed flow control and Rada VR105 vandal resistant chrome plated shower head with integral strainer, flow regulator and with adjustable spray angle option.

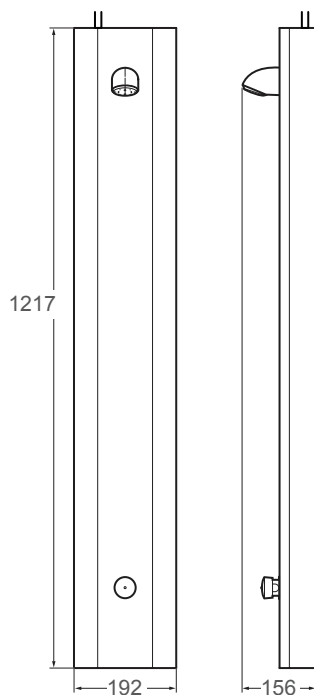Dimensions (mm)**Specification Enquiries**

TECHNICAL SPECIFICATION

Installation and Maintenance

Please refer to the appropriate Product Manual.

Quick and easy to install and service. Each panel supplied with 15 mm isolating ball valves on inlet as standard. All components that require routine test and maintenance are easily accessible.

Connections

Inlet: 15 mm compression to blended water inlet pipe.

Approvals

WRAS approved (Water Regulations Advisory Scheme).
Designed, manufactured and supported in accordance with accredited BS EN ISO 9001:2008 Quality Management Systems and BS EN ISO 14001:2004 Environmental Management Systems.

Operation

The flow cycle is activated by pressing the flow button. The flow rate is constant and is automatically turned off after approximately 30 seconds. Further economy of water usage can be achieved by means of an internal flow rate adjuster.

Materials

Panel Case: Brushed stainless steel finish.
Stainless steel braided flexible hoses with EPDM liner used throughout.
Timed flow control: body and some internal components are manufactured from copper alloys. Other internal components are made from engineering plastics.
Shower head: Chromium plated copper alloy body and engineering plastic spray plate.


Pressures

Minimum maintained pressure with 9 l/min flow regulator fitted in shower head: 0.5 bar
Minimum maintained pressure with flow regulators removed: 0.2 bar
Maximum static pressure: 7.0 bar
For further guidance on the correct choice of Rada thermostatic valve relative to the number of shower panels required phone 01242 282527.

Application

For leisure centres, schools, factories, prisons, military establishments, etc, where vandal resistance and water economy are prime requirements.
Long slimline panel aids wall coverage. Particularly suitable for upgrading existing surface mounted shower installations as no chasing out of walls or breaking of tiles is required.
Requires pre-blended water supplied from Rada group control thermostatic mixing valve.

Flow Diagram

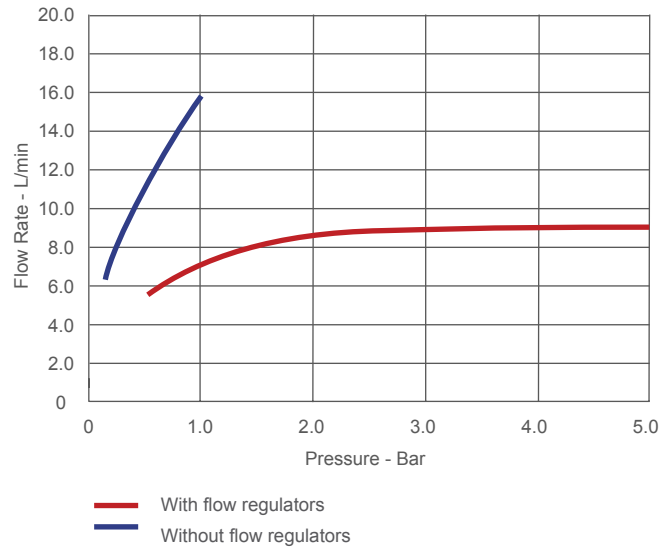

Weight

| Product | Gross Weight (Kgs) | Total Packaged Weight (Kgs) |
|--------------|--------------------|-----------------------------|
| Rada PA - TF | 7.40 | 9.00 |

Kohler Mira Limited
Cromwell Road, Cheltenham
Gloucestershire, GL52 5EP

Specification Enquiries
Tel: 0844 571 1777, Fax: 0844 472 3076
Email: rada_technical@mirashowers.com
www.radacontrols.com

Rada is a registered trademark of Kohler Mira Limited.
The company reserves the right to alter product specification without notice.
© January 2012 Kohler Mira Limited. All rights reserved.
No part of this document, or any accompanying document, may be reproduced or transmitted in any form or by any means, including photocopying or electronically, without the permission of Kohler Mira Limited.

A **KOHLER** COMPANY



FM 14648

