

## MEYNELL BONUS BATH AND THERMOSTATIC SHOWER MIXER




- Combined manual bath mixer and thermostatic shower
- Suitable for all baths with standard 180 mm tap hole centres
- Simple and quick to install
- Attractive, easy clean design
- Standard washer bath tap headworks




Specify as: **Meynell Bonus (PEBS0026.1P)**

Bath/thermostatic shower mixer with conventional washer bath tap headworks.

## Dimensions (mm)

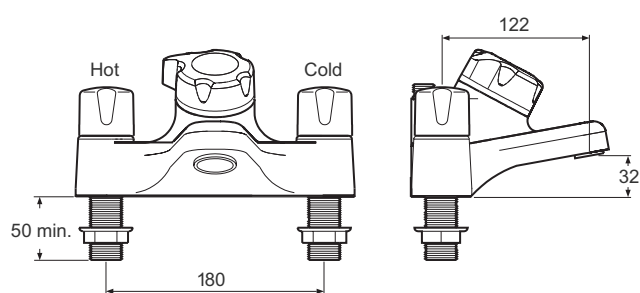

## Flow Diagram

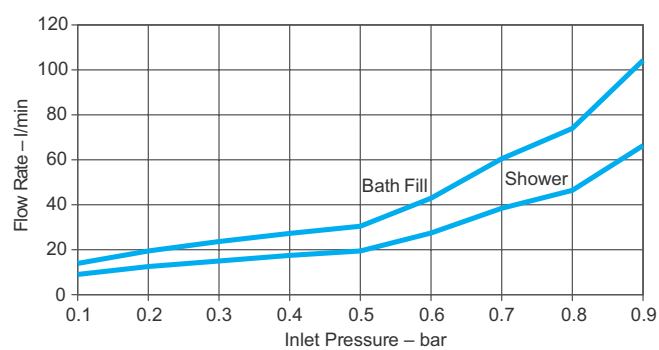

**Kohler Mira Limited**  
Cromwell Road  
Cheltenham  
Gloucestershire  
GL52 5EP

**Specification Enquiries**  
Tel: 0844 571 1777  
Fax: 0844 472 3076  
Email: [rada\\_technical@mirashowers.com](mailto:rada_technical@mirashowers.com)  
[www.radacontrols.com](http://www.radacontrols.com)

**rada**

TECHNICAL SPECIFICATION

**Installation and Maintenance**

Please refer to the appropriate Product Manual.

**Connections**

Inlets: 3/4" BSP male.

Shower outlet: 1/2" BSP male.

**Approvals**

Designed, manufactured and supported in accordance with accredited BS EN ISO 9001:2008 Quality Management Systems and BS EN ISO 14001:2004 Environmental Management Systems.

**Operation**

The outside knobs control the flow of water to the central bathfill outlet. Anticlockwise movement turns the water flow on.

When the central knob is turned on, anticlockwise, water is delivered to the shower outlet.

**Materials**

Body: Chrome plated brass.

**Temperature Range**

Factory preset outlet temperature: 42°C (adjustable).

Minimum temperature differential between each inlet and preset shower outlet temperature: 10°C.

Optimum temperature range: 35°C - 45°C.

Maximum hot water temperature: 85°C (for safety reasons it is recommended that the hot water storage temperature is maintained at between 60°C to 65°C in ablutionary applications).

Maximum cold supply temperature: 25°C.

Maximum hot supply temperature: 85°C.

**Pressures/Flow Rate**

Minimum maintained pressure (gravity system): 0.1 bar (to highest shower position).

Minimum maintained pressure (gas water heater): 1.0 bar.

Maximum static pressure: 10 bar.

Maximum pressure loss ratio: 5:1 (in favour of either supply).

**Note!** Both hot and cold pressure should be nominally equal.

**Weight**

Product	Gross Weight (Kgs)	Total Packaged Weight (Kgs)
Meynell Bonus	4.860	5.243

**Kohler Mira Limited**  
Cromwell Road, Cheltenham  
Gloucestershire, GL52 5EP

**Specification Enquiries**  
Tel: 0844 571 1777, Fax: 0844 472 3076  
Email: rada\_technical@mirashowers.com  
www.radacontrols.com

**Rada is a registered trademark of Kohler Mira Limited.**  
The company reserves the right to alter product specification without notice.  
© January 2012 Kohler Mira Limited. All rights reserved.  
No part of this document, or any accompanying document, may be reproduced or transmitted in any form or by any means, including photocopying or electronically, without the permission of Kohler Mira Limited.

A **KOHLER** COMPANY



FM 14648

