Î

4

RADA PULSE RELAY BOX


- Designed to be connected to and controlled by the Rada Pulse Control Box
- Provides three switched relays which enable the Rada Pulse Control Box to be used to initiate the operation of such as pumps, lights and fans
- All three relay outputs are fuse protected



Specify as: Rada Pulse Relay Box (2.1495.044)

For use with the Rada Pulse Washroom Control Box to provide three switched relays for operation of pumps, lights and fans.

Dimensions (mm)

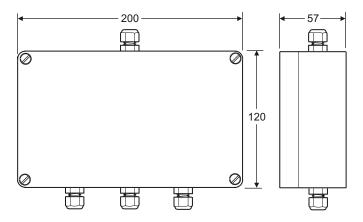

Kohler Mira Limited Cromwell Road

Cheltenham Gloucestershire GL52 5EP Specification Enquiries Tel: 0844 571 1777 Fax: 0844 472 3076 Email: rada_technical@mirashowers.com www.radacontrols.com



TECHNICAL SPECIFICATION

Description

The Rada Pulse Relay Box is designed to be connected to the auxiliary outputs of the Rada Pulse Control Box. It provides three switched relays which enable the Rada Pulse system to be used in conjunction with equipment such as pumps, lights and fans. All three relay outputs are protected by fuses.


Approvals

Designed, manufactured and supported in accordance with accredited BS EN ISO 9001:2008 Quality Management Systems and BS EN ISO 14001:2004 Environmental Management Systems. Complies with all relevant directives for CE marking.

Electrical Specification

Output Fuses: 5 AT Auxiliary Inputs (from Rada Control Box): 10 mA 12 V AC Fan Relay Output: Fused at 5 A max. 42 V AC, 10 A potential free alarm contact Light Relay Output: Fused at 5 A max. 42 V AC, 10 A potential free alarm contact Pump Relay Output: Fused at 5 A max. 42 V AC, 10 A potential free alarm contact Ambient Temperature Range: 0 - 40 °C Maximum Humidity: 80% at 25 °C Box: Sealed to IP24

Wiring Diagram

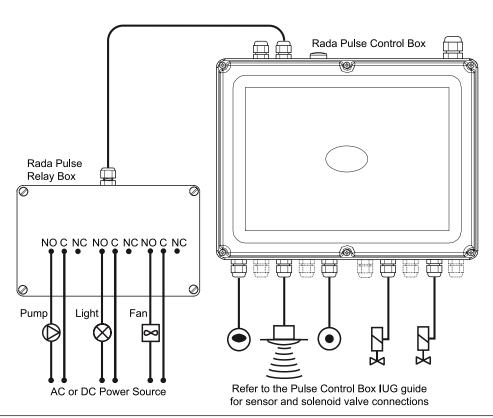

Rada is a registered trademark of Kohler Mira Limited.

The company reserves the right to alter product specification without notice. © January 2012 Kohler Mira Limited. All rights reserved. No part of this document, or any accompanying document, may be

reproduced or transmitted in any form or by any means, including photocopying or electronically, without the permission of Kohler Mira Limited.





 Specification Enquiries
 reproduct

 Tel: 0844 571 1777, Fax: 0844 472 3076
 photocop

 Email: rada_technical@mirashowers.com
 reproduct

A **KOHLER**COMPANY

Kohler Mira Limited

Cromwell Road, Cheltenham

Gloucestershire, GL52 5EP

www.radacontrols.com