


**Range:** Direct dual flush valve with adjustable volumes with brushed chrome-plated front plate

**Ref:** 14320 - PRESTO 1000 XL E DVA - 3L/6L with brushed chrome-plated front plate

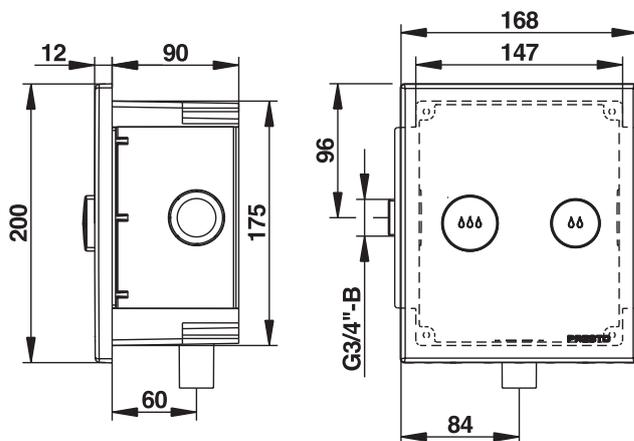

#### > Working pressure:

- 1 to 5 bar

#### > Discharge volume per flush:

- High volume: from 6 to 9 liters adjustable with wrench
- Low volume: from 2.5 to 5 liters adjustable by the slider on front plate
- Anti-water-hammering device
- Automatic 1 l/s flow regulator from 1.2 to 4 bar dynamic working pressure

#### > Flow time:

- High volume: 6 to 9 seconds
- Low volume: 2 to 5 seconds

#### > Hydraulic supply:

- Right or left square M G 3/4" (20x27)
- Outlet connection on flush pipe Ø 28 mm

#### > Material and colour finish:

- DZR Brass body
- Brushed chrome-plated front plate with anti-fingerprint

#### > Security:

- Vacuum breaker device prevents the contamination of the water network from polluted water backflow
- Patented anti-blocking "S" system preventing the tap to be blocked in open position to avoid continued water flow

#### > Delivered with:

- 1 Concealed ABS case
- 1 Brushed chromed -plated front plate
- 1 Flush valve PRESTO 1000XL type with integrated stop-valve
- 1 Instruction manual

#### > Standards & approvals:

- DZR Brass body in accordance with K UK Reg 4, certificate number 2201723, which verifies the requirements of "Regulation 4(1)a of the Water Supply (Water Fittings) Regulations 1999 England & Wales: 2009 Northern Ireland and 2014 Byelaws Scotland".
- Nickel-Chrome plated according to EN12540
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227

